




STANDARD GRAPHICS MODULES

G6498X01OUTLINE DIMENSION AND ELECTRICAL SPECIFICATION

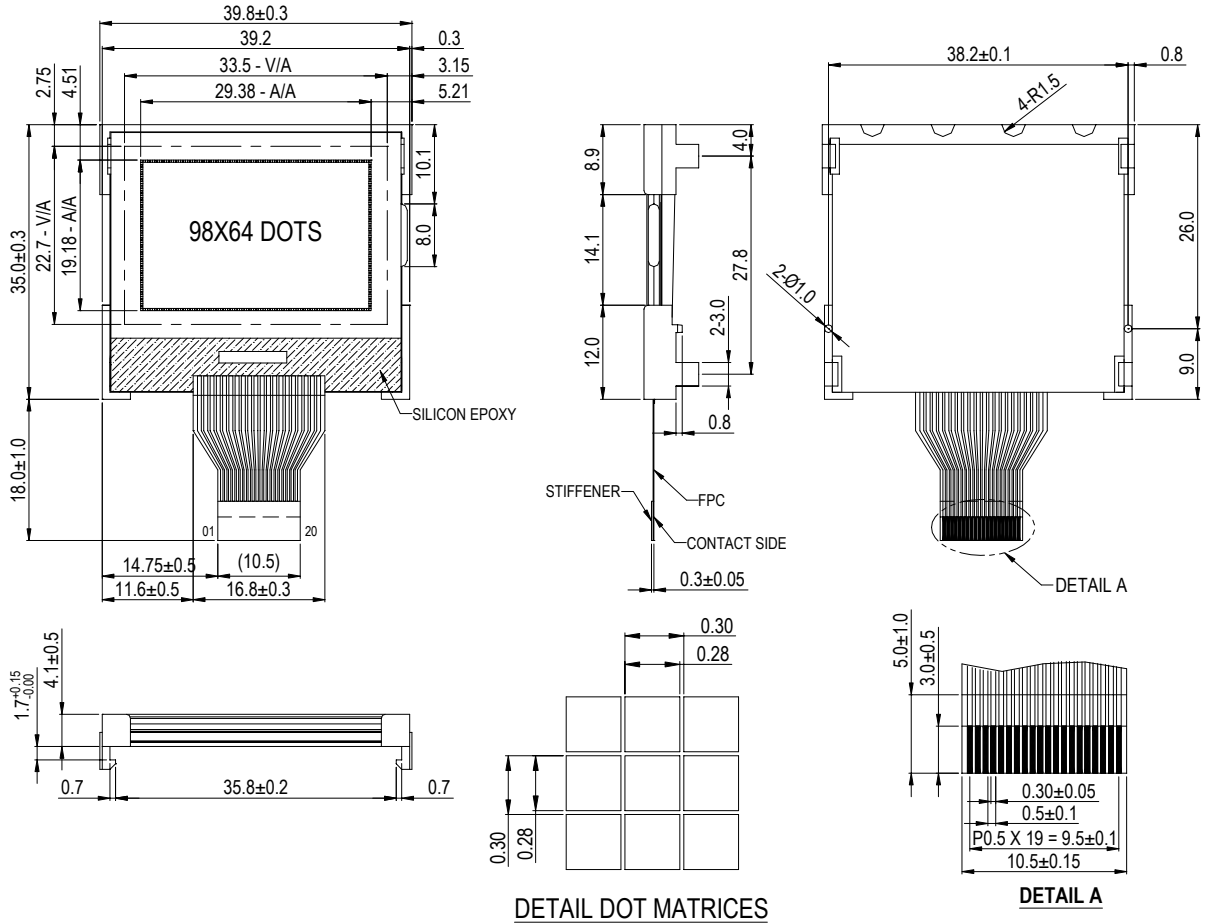

NOTES :

- 1.VDD = 3.0V (TYP); 3.5V (MAX)
- 2.VLCD = 9.5V±5% (TYP)
- 3.IDD = 400uA (TYP)
- 4.DUTY CYCLE = 1/64
- 5.BIAS = 1/9
- 6.CONTROLLER = SSD1818 SOLOMON
- 7.CONNECTOR = FPC
- 8.UNMARKED TOLERANCES = ±0.30mm

PIN ASSIGNMENT

PIN	1	2	3	4	5	6	7	8
SYMBOL	VL6	VL5	VL4	VL3	VL2	C4N	C2P	C2N
PIN	9	10	11	12	13	14	15	16
SYMBOL	C1N	C1P	C3N	VEE	VSS	VDD	SDA	SCK
PIN	17	18	19					
SYMBOL	D/C	/RES	/CS					

BACKLIGHT OPTION

LED COLOR	OPTION	VOLTAGE(V)	FORWARD CURRENT(mA)		
			MIN	TYP	MAX
YELLOW GREEN	NO	-	-	-	-
WHITE	NO	-	-	-	-
BLUE	NO	-	-	-	-

CCT reserves the right to vary or make changes to the specifications of the module in this brochure at any time without prior notice. CCT further assumes no responsibility for its use, nor for any infringements of patents, pending applications or the rights of thirds parties as a result of its use.